

STUDY OF FRICTION IN A HELICAL PAIR

MUSCĂ Ilie, CIORNEI Florina Carmen, PĂTRAȘ-CICEU Simion
„Ștefan cel Mare” University of Suceava
Iliem@fim.usv.ro

Keywords: friction coefficient, screw –nut pair, optimizing machine elements

Abstract: In order to optimize mechanical systems, is extremely important to understand the friction phenomena from different mechanical pairs. For the case of screw-nut pairs, sliding frictional forces are distributed over the thread surfaces in a complex manner. A test rig was constructed to study the friction from a screw–nut pair, with both elements made of steel, is shown in Fig. 1. After calibrating the driving-measuring system, Fig. 2, sets of test were run and an average value of the friction coefficient was computed. It was noticed a small tendency of decreasing for friction coefficient with increasing loading force and this was attributed to a better behaviour under lubrication, as seen in plots from Fig. 3.



Fig. 1. Test rig

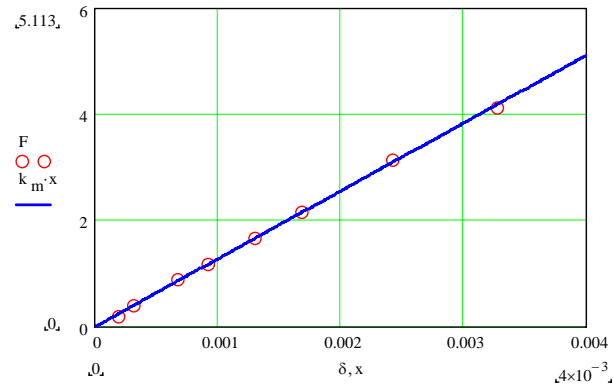


Fig. 2. Calibration results

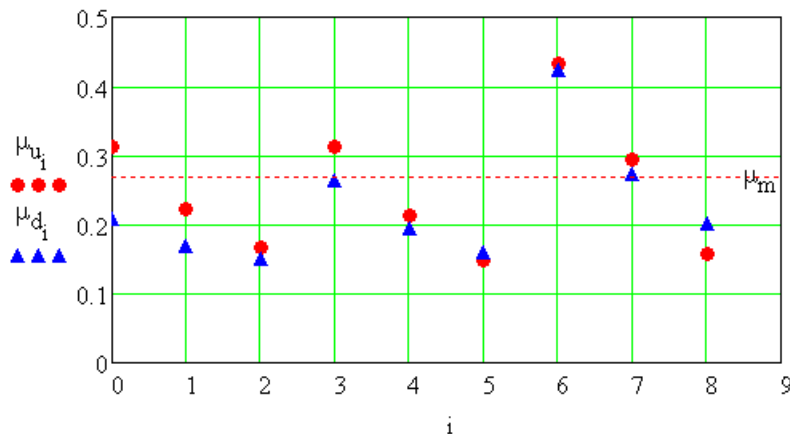


Fig.3. Experimental results

REFERENCES

- [1] Brown, Th. H.Jr., *Mark's Calculations for Machine Design*, McGraw-Hill, 2005;
- [2] Demian, T., *Elemente constructive de mecanica fina*, EDP, Bucuresti, 1980 ;
- [3] Diaconescu, E., Glovnea, M., *Elemente de teoria elasticității cu aplicații la solicitări simple*, Editura Universității din Suceava, 2007;
- [4] Ludema, K.C., *Friction, Wear, Lubrication-A Textbook in Tribology*, CRC Press, 1996;
- [5] Stolarski, T.A., *Tribology in Machine Design*, Butterworth-Heinemann, 2000.